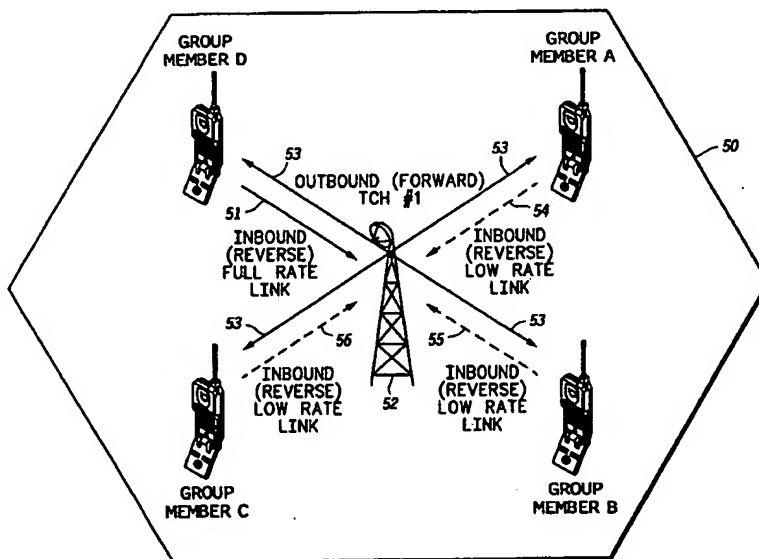


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04J 13/00, 3/02, H04B 7/185, 7/19	A1	(11) International Publication Number: WO 99/22478 (43) International Publication Date: 6 May 1999 (06.05.99)
(21) International Application Number: PCT/US98/15954 (22) International Filing Date: 31 July 1998 (31.07.98) (30) Priority Data: 08/959,327 28 October 1997 (28.10.97) US 08/959,152 28 October 1997 (28.10.97) US (71) Applicant: MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US). (72) Inventors: CHINITZ, Leigh, M.; 125 E. Colfax Street, Palatine, IL 60067 (US). NEEDHAM, Michael, L.; 354 W. Hellen Road, Palatine, IL 60067 (US). WILSON, Timothy, J.; 4200 Oaksbury Lane, Rolling Meadows, IL 60008 (US). (74) Agents: PAPPAS, George, C. et al.; Motorola Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>	

(54) Title: **CDMA DISPATCH SYSTEM**

(57) Abstract

A quality dispatch service on a CDMA based wireless system (50). To achieve spectral efficiency and fast access for follow-up calls, in response to a request by a talkgroup member (A-D) to have a group call established, the non-requesting (listening-only) members (B-D) are allowed to establish a low-rate (non-voice) signaling link (54-56) in the reverse direction (inbound) for the limited purpose of (i) providing forward power control information to the fixed infrastructure; (ii) requesting soft hand-off when required; and (iii) maintaining the correct reverse link power control to allow for fast channel access for a follow-on call.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

CDMA DISPATCH SYSTEM

Field of the Invention

5

The present invention relates generally to the field of wireless communications, and more particularly, to code division multiple access (CDMA) communication systems and dispatch group call communication systems.

10

Background of the Invention

A typical dispatch two-way radio communication system comprises communication units, communication resources, communication sites, and a communication resource allocator. Each of the sites have a substantially distinct coverage area and are geographically located throughout the system. Each site also has a number of communication resources assigned to it, where at least one of the communication resources is used as a control channel, while a number of the remaining communication resources are used as voice channels. Such systems are known to use both frequency division multiplex access (FDMA) and time division multiple access (TDMA) methods to rebroadcast transmissions.

25

The communication units are typically arranged into communication groups (talkgroups) and may be located anywhere within the system (in any site). When a communication unit of a talkgroup requests a group call, it transmits, via a control channel of the site in which it is located, an inbound signaling message to the communication resource allocator. (A group call typically allows all members of the same talkgroup that are located within the system to communicate with each other.) The inbound signaling message generally comprises the requesting communication unit's individual identification number, the requesting communication unit's talkgroup, and a request for a group call. Upon receiving the inbound signaling message, the communication resource allocator

30

35

will allocate a voice channel in each site to the requesting communication unit's talkgroup.

Thus, in FDMA and TDMA dispatch systems a forward link is
5 established (one in each site where communication units are present)
and monitored by all units involved in the group call in that site, and
a single reverse link which is used by the group member who is
currently transmitting to the other members. Non-transmitting
talkgroup members are typically in a listen only mode (i.e., not able
10 to transmit when another member is talking) and thus are not
allocated a dedicated reverse link. In a TDMA system, for example,
time slots are allocated to different users. A talkgroup member
transmitting on an assigned reverse link, is allowed to use full power
transmission to support short bursts of signals in allocated time slots.
15 Despite the discontinuous or discrete nature of this approach, the
listener receives what appears a continuous service.

In the last decade, in response to an ever-accelerating
worldwide demand for mobile and personal portable
20 communications, spread spectrum digital technology, of which one
type is known as CDMA, has achieved much higher bandwidth
efficiency for a given wireless spectrum allocation, and hence has
proved to be an excellent alternative for serving large populations of
multiple access users, than analog or other digital technologies.
25 CDMA relies on processing power to extract a coded signal
embedded across a broad frequency spectrum. The only way to
extract the wanted signal from among many other overlaid unwanted
signals is to have the right code. The use of coding allows more
channels to be derived by the overlaying of carriers one over another
30 and greatly enhances performance in terms of derived channels per
hertz of bandwidth.

CDMA is well suited for cellular communications, but has
never been employed in a conventional dispatch system. Current
35 CDMA systems employ a form of forward power control. This
means that, in a typical one-to-one (cellular) conversation, the

communication unit periodically informs the base station how well it is receiving the outbound signal. If possible, the base station reduces its outbound power. If necessary, the base station increases its outbound power. This communication between the base station and the communication unit requires a two-way communication link between the two. In a dispatch situation, the most intuitive outbound power control scheme is for the base station to respond to requests to increase the power coming from any unit which requires it. However, this can only occur if all units involved in the dispatch call have an established two-way communication link.

CDMA systems also use soft hand-off at cell (site) boundaries which, in a dispatch setting, would require each of the listening units to signal the base station when another cell is found to have sufficient (usually greater) signal strength to handle the call as the communication unit migrates away from the base station, and closer to another base station. In turn, the base station will enable the now closer base station to both send and receive the same traffic to and from the migrating communication unit. In order for this procedure to take place, the communication unit must have a communication path in to the fixed end.

Reverse power control is another important aspect of CDMA systems. (In fact, this is much more important than forward power control.) Reverse power control attempts to equalize the received signal powers for all communication units controlled by a particular base station. By having the base station monitoring (and accordingly vary) power from listening communication units, the efficiency of CDMA is realized.

In order to avoid excessive interference on the reverse link, communication units accessing the channel for the first time (i.e., before reverse power control has been established) use what is known as "access probes". This means that they access the channel with low power, and slowly ramp up their power until a response from the fixed end tells them that their signal has been received. For

cellular communications, the time delay caused by this access method is insignificant. On the other hand, the time delay in setting up a link for a follow-up call during a dispatch group call would be significant and must necessarily have been established in advance. In dispatch,
5 any one of the talkgroup members may want to send an inbound message and then drop back to listening status. If each access required access probes, the delay would be intolerable for a quality dispatch service.

10 As stated above, non-CDMA systems do not have multiple reverse link connections in a dispatch call because the nature of the access methodology (TDMA or FDMA) does not demand it (quality dispatch functionality is possible for listening units without the power control and soft hand-off required in CDMA systems). TDMA and
15 FDMA systems assemble a talkgroup by alerting the members of the call, and informing them of where to tune to listen to the call. The establishment of multiple reverse (inbound) signaling links is simply not an issue. For CDMA systems, there are to date only point-to-point communication protocols established (i.e., dispatch capability
20 has never been deployed). Therefore, the establishment of multiple reverse signaling links and the conflict that this can cause with the strict timing requirements of a dispatch service have not been addressed.

25 A hybrid TDMA/CDMA system indirectly addressing the delay problem with CDMA channel access was proposed in U.S. Patent No. 5,295,152, entitled "TDMA for mobile access in a CDMA system". In the proposed system, a separate TDMA channel is defined, either separated in frequency band or time interleaved in the
30 same frequency band as the CDMA channel. Because TDMA does not require stringent inbound power control, immediate access on the TDMA channel portion is possible without the access probe delays seen in CDMA. This TDMA channel could therefore be used for access and control signaling (e.g., fast follow-up in a dispatch call),
35 while the CDMA portion of the system would be used for the traffic channels. Such a hybrid approach, however, would require

essentially two different types of radio equipment (TDMA and CDMA) at the base and mobiles ends, leading to higher costs, and may present interference problems to nearby, pure CDMA systems.

5 Providing all listening-only units on a CDMA system with a full traffic capable reverse link would quickly deteriorate system performance in a heavy user system due to excessive interference and would be a great waste of resources. CDMA systems are interference limited, in that capacity is determined by the amount of interference
10 due to all the users on the system. An alternative might be to set up non-talking group members in a listen-only mode with no reverse link whatsoever. However, this latter scenario would lead to serious difficulties with forward power control, soft hand-offs, and rapid channel access for the follow-on calls in the dispatch conversation
15 (group call).

 It would be a great advancement in the art of dispatch communications to be able to provide quality dispatch service on a CDMA based wireless system.

20 Reverse links are necessary in a CDMA dispatch system since such links provide to listening group call members the means for inbound power control to enable fast access in response to the dispatch call, the means for outbound power control, and the means
25 for enabling soft hand-off. The establishment of these links, however, could seriously impact the call setup time, and thus service quality. There is also a further need therefore for a CDMA based wireless system which establishes reverse links for all talkgroup members participating in a dispatch call but that does so without
30 seriously negatively impacting the call set up time and thus service quality.

Brief Description of the Drawings

FIGURE 1 is a block diagram of a CDMA based wireless dispatch communication system in accordance with the present invention.

FIGURE 2 is a flow chart illustrating a method for use by the fixed infrastructure in accordance with a first illustrative embodiment of the present invention.

FIGURE 3 is a flow chart illustrating a second illustrative embodiment of the present invention.

FIGURE 4 is a flow chart illustrating a third illustrative embodiment of the present invention.

FIG. 5 shows an exemplary four member talkgroup (Group members A-D) CDMA dispatch service operating within a single cell site, in accordance with the present invention.

Detailed Description of the Preferred Embodiments

Generally, the present invention involves providing quality dispatch service on a CDMA based wireless system. To achieve spectral efficiency and fast access for follow-up calls, in response to a request by a talkgroup member to have a group call established, the non-requesting (listening-only) members are allowed to establish a low-rate (non-voice) signaling link in the reverse direction (inbound) for the limited purpose of (i) providing forward power control information to the fixed infrastructure; (ii) requesting soft hand-off when required; and (iii) maintaining the correct reverse link power control to allow for fast channel access for a follow-on call. In accordance with a first illustrative embodiment, the establishment of low-rate reverse links occurs prior to beginning the voice communications. Because a low-rate signaling link, as contemplated by the present invention, is a non-voice link which signals at a

predetermined rate substantially less than that of a full-rate traffic link, proportionately less average power is required for dispatch communications than would otherwise be the case if full-rate traffic links were provided instead to non-talking talkgroup members. The
5 present solution results in less interference to the CDMA system and thus substantially less impact on overall system capacity.

In an alternative illustrative embodiment, the establishing of multiple reverse links in a CDMA dispatch call occurs as a
10 background process while beginning the voice communications immediately.

The present invention can be more fully described with reference to FIGS. 1-5. FIG. 1 is a block diagram of a wireless
15 communication system 100 in accordance with the present invention. The wireless communication system 100 is a CDMA system, as known in the art, and comprises a plurality of subscriber units 104-109 arranged into at least one talkgroup 101 in wireless communication with a fixed infrastructure 103. In the illustrative
20 embodiment, each of the subscriber units is physically capable of duplex communications.

Communication channels 117-128 are effectively provided through the use of codes, often referred to a pseudorandom noise
25 (PN) sequences in conventional cellular CDMA systems. As described in further detail below, an outbound code is used to effectively provide outbound communication channels (forward links) 117-122 to each subscriber unit in the talkgroup 101. Additionally, inbound codes are used to effectively provide inbound
30 communication channels (reverse links) 123-128 to each subscriber unit in the talkgroup 101. Use of PN codes to establish a communication link between the fixed infrastructure 103 and a given subscriber unit is well known in the art of CDMA and forms no part of the invention.

35

The fixed infrastructure 103 comprises those elements normally required to support communications within the wireless system 100 and, in the preferred embodiment, conforms to a typical CDMA architecture. In particular, fixed infrastructure 103
5 comprises a switch 110 in communication with a controller 111 that, in turn, is in communication with base transceiver systems (BTSs) 112-113. The switch 110 (often referred to as a Mobile Switching Center or MSC), controller 111 (often referred to as a Base Station Controller or BSC) and BTSs 112-113 are all well known in the art.
10 In practice, switch 110 typically communicates with more than one controller, and may communicate with other equipment not shown. For purposes of simplicity, fixed infrastructure 103 has been limited as shown in FIG. 1.

15 Fixed infrastructure 103 may also optionally include a dispatch controller 114 in communication with BTSs 112-113. A suitable dispatch controller 114 is the Dispatch Application Processor used in the "iDEN" wireless communication system manufactured by Motorola, Inc. The management of group call processing is
20 preferably handled by the controller 111 or, if available, by the dispatch controller 114. Additionally, the functionality of group call handling, as described below, may be distributed throughout the fixed infrastructure 103.

25 FIG. 2 is a flow chart illustrating the method for use by the fixed infrastructure 103. Although the method described in FIG. 2 is generally implemented by the fixed infrastructure 103, the method is preferably carried out by the controller 111 or by the dispatch processor 114, if available. Also, the functionality illustrated in FIG.
30 2 is implemented in as stored software routines that are executed by the platforms in which the software is stored.

Referring to FIG. 2, there will now be described a first illustrative embodiment relating to the establishment of low-rate
35 inbound (reverse) links prior to beginning the voice communications in a quality CDMA dispatch environment.

The fixed infrastructure 103 (generally also referred to as the "fixed end") detects a request by the subscriber unit of the first group member for a group call (201). This typically involves a first
5 mobile or subscriber unit whose user is a member of the talkgroup initiating a group call by signaling inbound on a common access channel (generally also referred to as a "control channel"). The fixed end 103 responds to the group call request by signaling
10 outbound on a control channel to all group call members, indicating assigned outbound traffic channel code (202). Before the fixed end begins outbound transmission of audio to all group call members (206), it begins monitoring a control channel for transmissions
initiated, in contention fashion, from the non-talking group members attempting to establish a low-rate inbound link (203), by notifying
15 the fixed end of their unique PN code; for purposes of participating in the group call.

The fixed end responds outbound on a control channel (or on the assigned full-traffic outbound link) to each non-talking mobile
20 unit as each mobile unit's request is received, indicative that a low-rate inbound signaling link has been established (204). The fixed end then monitors the low-rate inbound signaling links using the unique PN codes of participating non-talking group members to provide and maintain power control and/or soft hand-off operation (205). After
25 sufficient time, to allow all interested group members to establish low-rate inbound signaling links, the fixed end begins outbound transmission of audio from the first subscriber unit/talkgroup member to the all group members (206).

30 It should be appreciated that because the subscriber units only establish a low-rate inbound signaling link while in the listening mode, system power and bandwidth resources are significantly better utilized than if a full-traffic inbound signaling link were established.

35 FIGS. 3 and 4 show alternative preferred embodiments for providing yet better fast call access in a heavy user dispatch

environment. Unlike the embodiment of FIG. 1 where inbound links are established prior to beginning of voice communications, the establishing of multiple reverse links will now be described where a CDMA dispatch call occurs as a background process while beginning
5 the voice communications immediately.

Referring to FIG. 3, a mobile unit (subscriber unit 104-109) initiates a group call by sending inbound signaling which identifies that the call is a group call, and which identifies the group (301). The
10 fixed infrastructure 103 notifies all members of the talkgroup of the code on which the voice communications will occur (302), and the voice communications are begun immediately (303). As the conversation progresses, the group members which are in listening mode signal inbound to the fixed end (304) and establish their low
15 rate signaling links (305, 306). The establishment of these links may occur using the same link establishment method as is used in standard cellular communications, i.e., access-probe signaling on a common inbound access channel. It should be noted that because the non-
20 talking mobile units will be trying to establish a link at substantially the same time, they will need to signal inbound, in contention fashion, until the inbound link is established. It is noted that contention algorithms are well known in the CDMA art and form no part of the present invention.

25 In an alternate embodiment shown in FIG. 4, low-rate signaling links may be established by each mobile unit signaling inbound to the fixed end using its own designated codes, similar to transmission that would be used for an established call. As in the embodiment shown in FIG. 3, a subscriber unit 104-109 initiates a
30 group call by sending inbound signaling which identifies that the call is a group call, and which identifies the group (401). The fixed end notifies all members of the group of the code on which the voice communications will occur (402), and the voice communications are begun immediately (403). Since the fixed end knows the designated
35 codes for all members of a group, it may monitor the inbound channel for codes corresponding to group members (404), rather

than receiving their responses on the common inbound access channel. Other non-talking subscriber units in the talkgroup monitor outbound audio, and begin signaling inbound using their designated, preassigned, unique codes to establish the low-rate signaling links
5 (405). The fixed end 103 responds outbound on a control channel or on the full-rate traffic outbound link (i.e., the traffic channel) to each non-talking subscriber unit as each unit's access request is received.

This latter method has the advantage that it avoids contention
10 on the common access channel by multiple units. However, it requires the fixed end to monitor a potentially large number of codes, increasing the processing requirements for the fixed end.

It was explained in connection with FIGs. 3 and 4 that in
15 establishing the low-rate signaling links the fixed end 103 may, since it knows the designated codes for all members of a group, monitor the inbound channel for codes corresponding to group members (404). Alternatively, it was proposed that links may be established by having the fixed end 103 receive requests for establishing
20 appropriate links, over the common inbound access channel. It is further contemplated that either scheme may be employed in the first illustrative embodiment discussed in connection with FIG. 2 regarding establishing low-rate links prior to the beginning of the voice communications in a setup group call, in substantially the same
25 manner.

FIG. 5 shows an exemplary four member talkgroup (Group members A-D) cooperatively coupled for dispatch communication within a single cell site 50. Shown is a first group member D
30 currently transmitting a signal (voice, data, etc.) over an inbound (reverse) full rate link 51 to the base station (BTS) 52 serving the site. All the talkgroup members (A-D) are set up to monitor the outbound (forward) full-traffic link 53 from the base station 52. The non-talking members A-C are linked to the base station 52 via
35 low-rate inbound links 54-56, respectively. The establishment of the inbound links 54-56 allows for fast follow-up call setup by a on-

talking group member wishing to talk using the full-rate inbound link 51. It should be noted that the talkgroup members could be geographically dispersed across multiple sites instead, as originally shown in FIG. 1. This requires that appropriate (full-rate/low-rate) inbound and outbound links be established substantially as in the single site illustration of FIG. 5.

It should be appreciated that the establishment of links as a background process enables the dispatch service to have fast call setup time which is a requirement of a quality dispatch service, since the necessary inbound (reverse) signaling links are established quickly. The links provide for soft hand-off, reverse and forward power control, and the setup in the background allows for initial fast call setup.

While the present invention has been particularly shown and described with reference to particular embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention.

We claim:

1. In a CDMA dispatch communication system comprising a fixed infrastructure and a plurality of subscribers units engaged in a group call wherein at least a plurality of group members, including a second group member, are listening to the group call on the same outbound link from the fixed infrastructure, and wherein a first group member is transmitting a signal on an inbound link to the fixed infrastructure, a method of establishing multiple low-rate inbound links comprising the fixed infrastructure performed steps of:
 - detecting a request by the subscriber unit of the first group member for a group call;
 - establishing a full-rate traffic inbound link with the subscriber unit of the first group member for transmitting a signal to the fixed infrastructure;
 - establishing a full-rate traffic outbound link with the subscriber units of each of the at least a plurality of group members so they can receive the signal from the fixed infrastructure; and
 - prior to transmitting the signal from the first group member to the fixed infrastructure, establishing for each the at least a plurality of group members, including the second group member, a low-rate inbound link, different from said full-rate traffic inbound link, for receiving at least one of forward power control information, soft hand-off information and reverse power information therefrom.

2. The method of claim 1, wherein the step of establishing inbound links with each group member involves identifying a unique code associated with a corresponding subscriber unit.
- 5 3. The method of claim 2, wherein the step of identifying a unique code associated with a corresponding subscriber unit involves selecting the unique codes from an associated talkgroup list of codes.
- 10 4. The method of claim 2, wherein the step of identifying a unique code associated with a corresponding subscriber unit involves receiving code information from the subscriber unit of each group member wishing to participate in the group call.
- 15 5. The method of claim 1, wherein the step of establishing low-rate inbound links with each of the at least a plurality of group members involves monitoring the low-rate inbound links while the full-rate inbound link is active.


6. In a CDMA dispatch communication system comprising a fixed infrastructure and a plurality of subscribers units engaged in a group call wherein at least a plurality of group members, including a second group member, are listening to the group call on the same outbound link from the fixed infrastructure, and wherein a first group member is transmitting a signal on an inbound link to the fixed infrastructure, a method of establishing multiple low-rate inbound links comprising the fixed infrastructure performed steps of:
- 5 detecting a request by the subscriber unit of the first group member for a group call;
10 establishing a full-rate traffic inbound link with the subscriber unit of the first group member for transmitting a signal to the fixed infrastructure;
15 establishing a full-rate traffic outbound link with the subscriber units of each of the at least a plurality of group members so they can receive the signal from the fixed infrastructure;
 transmitting the signal from the first group member to the fixed infrastructure; and
20 after the step of transmitting is initiated, establishing in the background for each of the at least a plurality of group members, including the second group member, a low-rate inbound link, different from said full-rate traffic inbound link, for receiving at least one of forward power control information, soft hand-off
25 information and reverse power information therefrom.
7. The method of claim 6, wherein the step of establishing inbound links with each group member involves identifying a unique code associated with a corresponding subscriber unit,
30 wherein the step of identifying a unique code associated with a corresponding subscriber unit involves one of (i) selecting the unique codes from an associated talkgroup list of codes and (ii) receiving code information from the subscriber unit of each group member wishing to participate in the group call.
- 35

8. In a CDMA dispatch communication system comprising a fixed infrastructure and a plurality of subscribers units engaged in a group call wherein at least a plurality of group members, including a second group member, are listening to the group call on the same
- 5 outbound link from the fixed infrastructure, and wherein a first group member is transmitting a signal on an inbound link to the fixed infrastructure, a method of establishing a low-rate inbound link, the method comprising the subscriber unit performed steps of:
- 10 receiving notification from the fixed infrastructure that a group call is being setup;
- establishing a full-rate traffic outbound link for monitoring signals transmitted from the fixed infrastructure;
- receiving the signal from the first group member on the full-rate traffic inbound link; and
- 15 after the step of receiving has been initiated, establishing in the background a low-rate inbound link, different from said full-rate traffic inbound link, for communicating at least one of forward power control information, soft hand-off information and reverse power information to the fixed infrastructure.

9. The method of claim 8, wherein the step of establishing an
inbound link involves sending by the subscriber unit a unique code
5 associated therewith used for encoding the information sent over the
associated low-rate inbound link.

10. The method of claim 8, wherein when the second group
member detects that the first group member has stopped
10 transmitting, the second group member transmits a signal over the
fixed infrastructure to the other group members using a full-rate
inbound link.


1/5

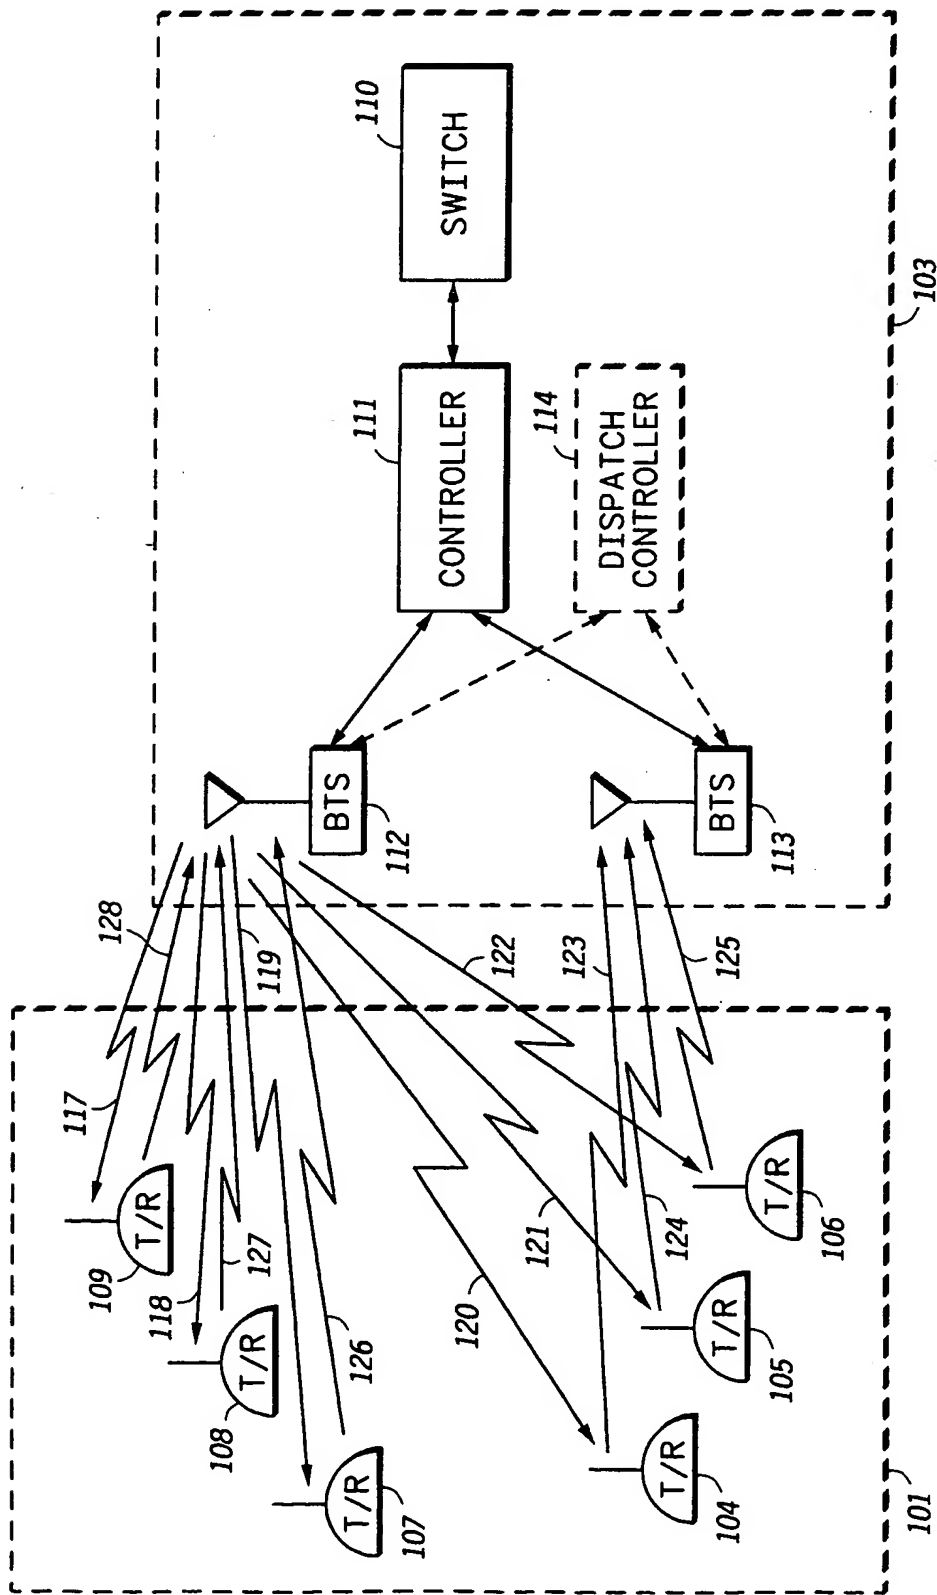


100

FIG. 1


2/5

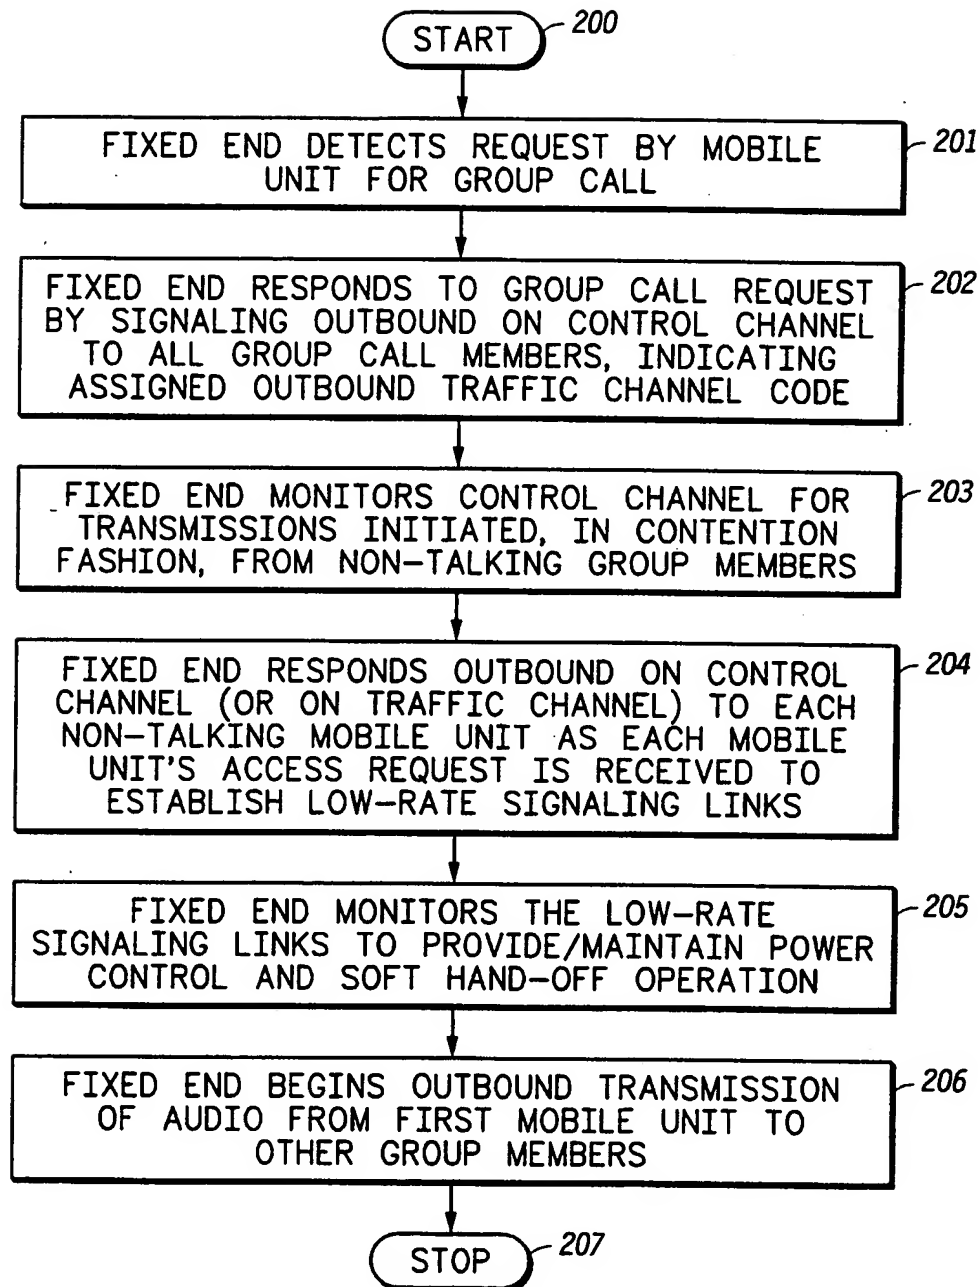*FIG.2*

3/5

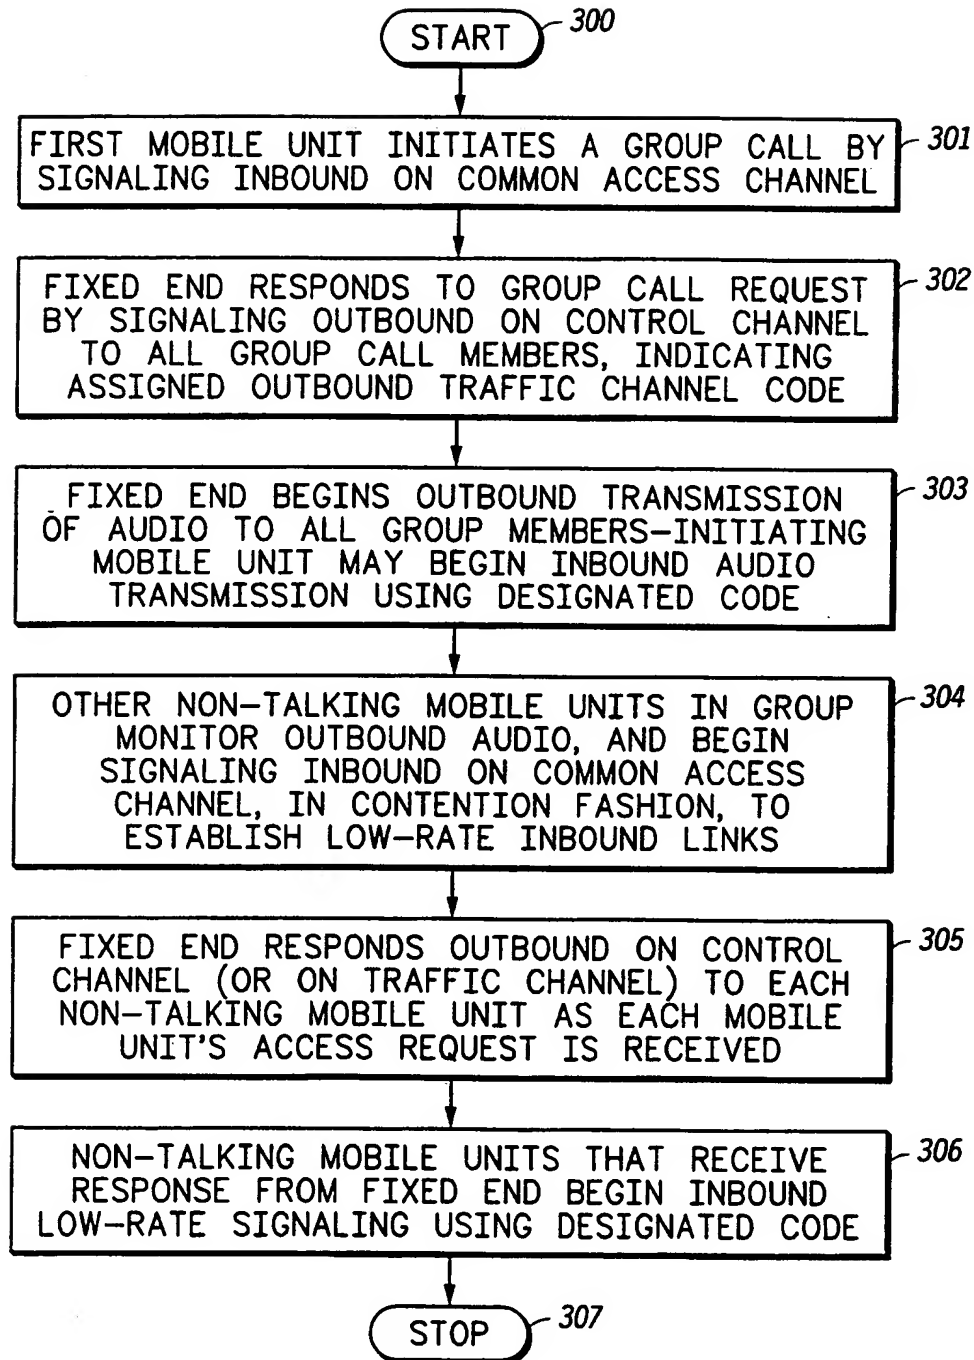*FIG. 3*

4/5

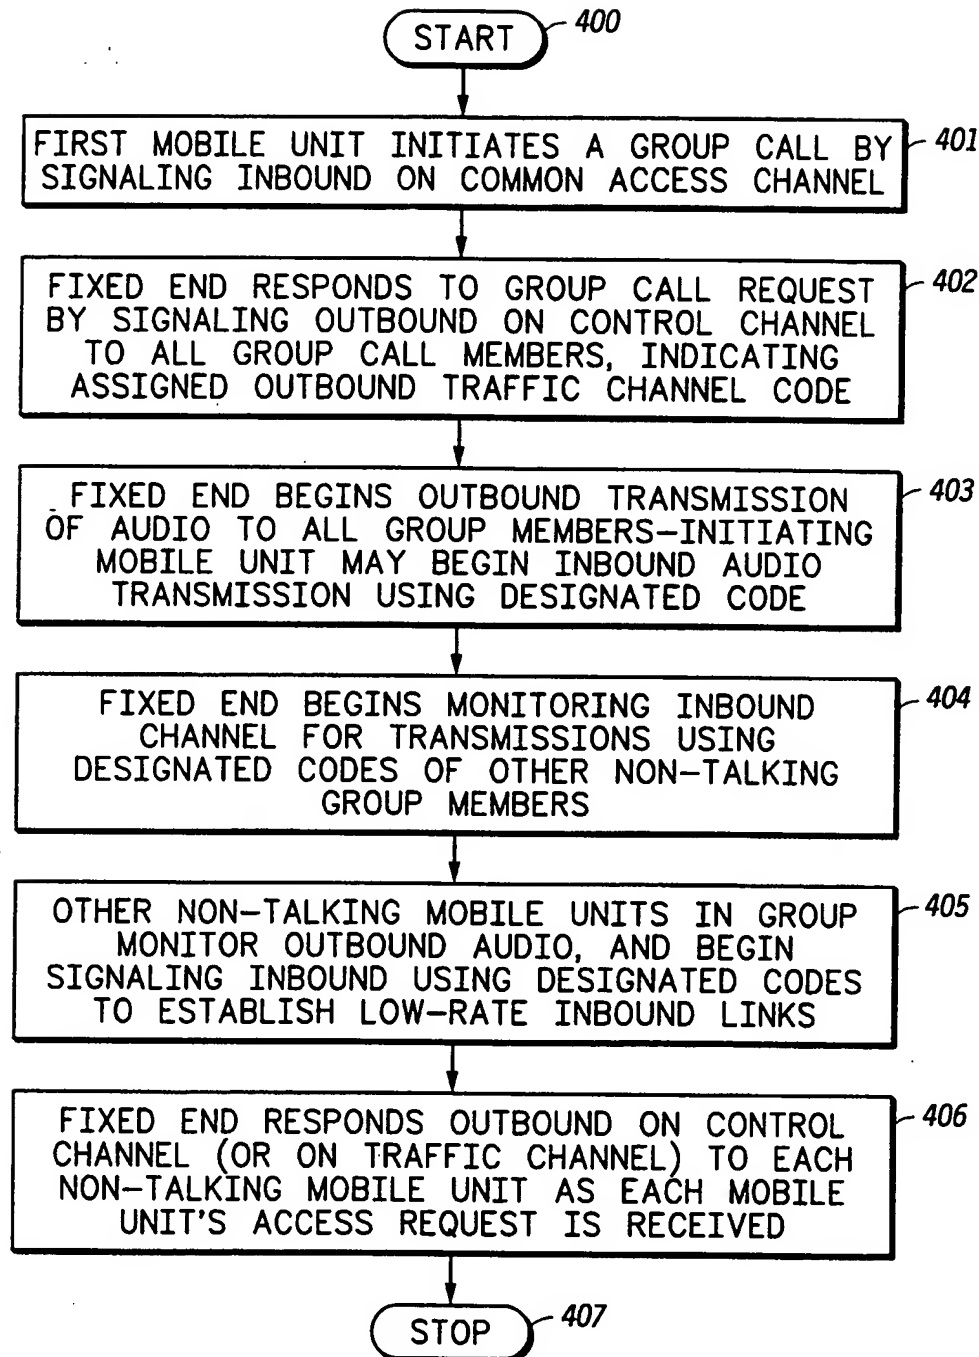*FIG. 4*

5/5

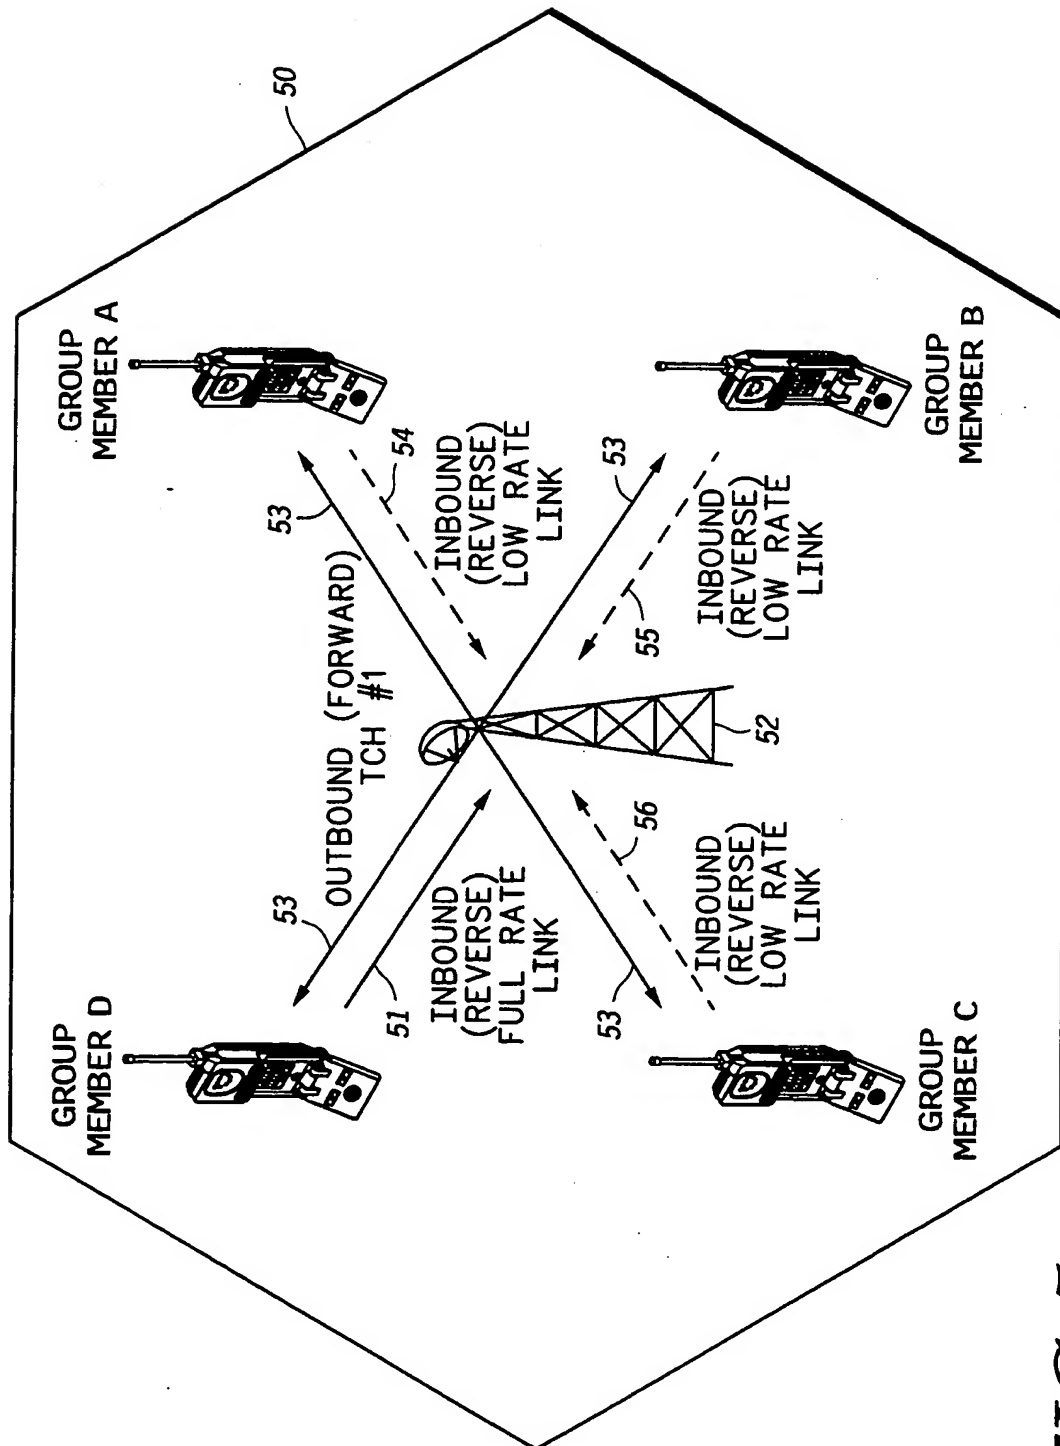


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/15954

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :H04J 13/00, 3/02; H04B 7/185, 7/19, 7/185

US CL :Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/331, 335, 336, 337, 342, 350, 400, 441; 455/13.2, 13.3, 13.4, 411, 422, 442, 445, 447, 456, 517

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

search terms: CDMA, power control, soft hand-off, traffic link, talkgroup

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A, P	US 5,724,648 A (SHAUGHNESSY et al.) 03 March 1998 (03.03.98), col. 1 lines 13-27 and col. 2 line 38 to col. 3 line 14.	1-10
A, P	US 5,781,536 A (AHMADI et al.) 14 July 1998 (14.07.98), see entire document.	1-10
A	US 5,295,152 A (GUDMUNDSON et al.) 15 March 1994 (15.03.94), see entire document.	1-10
A, P	US 5,768,684 A (GRUBB et al.) 16 June 1998 (16.06.98), see entire document.	1-10

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

18 OCTOBER 1998

Date of mailing of the international search report

19 NOV 1998

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

SHICK HOM

Telephone No. (703) 305-4742

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/15954

A. CLASSIFICATION OF SUBJECT MATTER:

US CL :

370/331, 335, 336, 337, 342, 350, 400, 441; 455/13.2, 13.3, 13.4, 411, 422, 442, 445, 447, 456, 517